




**Rohrbogen 90°
(segmentfrei)**
als Stecksystem mit Eingespritzter
Lippendichtung

**Tubular Bends 90°
(without segments)**
Plug-In System with Injected Lip Seal

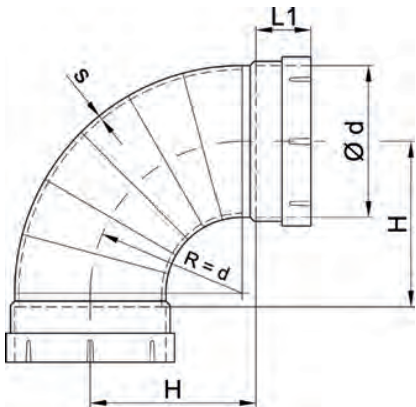


PPs, PP, PE, PPs-el				
Ø d	L1	H	s	kg
0050	25	55	3,0	0,1
0063	25	70	3,0	0,1
0075	35	80	3,0	0,2
0090	35	95	3,0	0,2
0110	40	120	3,0	0,3
0125	40	135	3,0	0,4
0160	40	170	3,0	0,5
0200	40	210	3,0	0,9
0250	50	260	3,0	1,5
0315	50	325	3,5	3,0

Beispiel für Artikelnummer Example of article number B2-90-0050-MD

Rohrbogen 45°
(segmentfrei)
als Stecksystem mit Eingespritzter
Lippendichtung

Tubular Bends 45°
(without segments)
Plug-In System with Injected Lip Seal

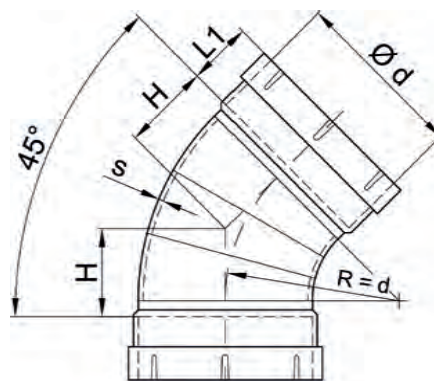


PPs, PP, PE, PPs-el				
Ø d	L1	H	s	kg
0050	25	30	3,0	0,1
0063	25	32	3,0	0,1
0075	35	35	3,0	0,1
0090	35	40	3,0	0,1
0110	40	55	3,0	0,2
0125	40	53	3,0	0,3
0160	40	75	3,0	0,3
0200	40	95	3,0	0,6
0250	50	115	3,0	0,9
0315	50	140	3,5	1,9

Beispiel für Artikelnummer Example of article number B2-45-0050-MD



Doppelmuffen
als Stecksystem mit Eingespritzter
Lippendichtung

Double Sockets
Plug-In System with Injected Lip Seal

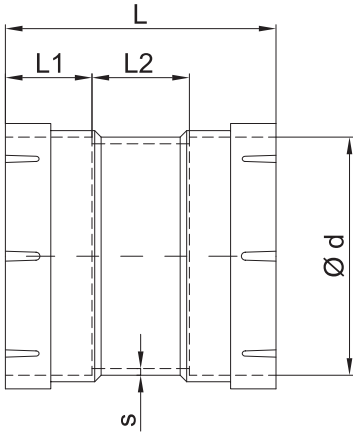


	PPs, PP, PE, PPs-el				
Ø d	L	L1	L2	s	kg
0050	80	25	30	3,0	0,1
0063	80	25	30	3,0	0,1
0075	100	35	30	3,0	0,1
0090	100	35	30	3,0	0,2
0110	95	40	15	3,0	0,2
0125	95	40	15	3,0	0,2
0160	95	40	15	3,0	0,2
0200	96	40	16	3,0	0,3
0250	125	50	25	3,0	0,4
0315	125	50	25	3,0	0,6

Beispiel für Artikelnummer Example of article number M2-0050-MD

Reduzierung Symmetrisch 63/50 bis 200/160 mm als Stecksystem mit Eingespritzter Lippendichtung

Reducers Symmetrical 63/50 to 200/160 mm Plug-In System with Injected Lip Seal

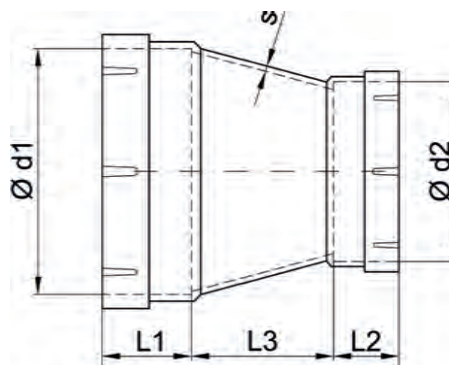


		PPs, PP, PE, PPs-el					
Ød1	Ød2	L	L1	L2	L3	s	kg
0063	0050	70	25	25	20	3,0	0,1
0075	0050	105	35	25	45	3,0	0,1
0075	0063	95	35	25	35	3,0	0,1
0090	0050	135	35	25	75	3,0	0,1
0090	0063	130	35	25	70	3,0	0,1
0090	0075	110	35	25	40	3,0	0,1
0110	0050	165	40	35	100	3,0	0,2
0110	0063	165	40	25	100	3,0	0,2
0110	0075	153	40	35	78	3,0	0,2
0110	0090	140	40	35	65	3,0	0,2
0125	0050	205	40	25	140	3,0	0,3
0125	0063	205	40	25	140	3,0	0,2
0125	0075	195	40	35	120	3,0	0,2
0125	0090	165	40	35	90	3,0	0,2
0125	0110	120	40	40	40	3,0	0,2
0160	0050	275	40	25	210	3,0	0,3
0160	0063	260	40	25	195	3,0	0,3
0160	0075	250	40	35	175	3,0	0,3
0160	0090	220	40	35	145	3,0	0,3
0160	0110	210	40	40	135	3,0	0,3
0160	0125	145	40	40	65	3,0	0,3
0200	0050	340	50	25	275	3,0	0,3
0200	0063	340	50	25	275	3,0	0,3
0200	0075	330	50	35	255	3,0	0,3
0200	0090	300	50	35	225	3,0	0,4
0200	0110	290	50	40	210	3,0	0,4
0200	0125	235	50	40	155	3,0	0,5
0200	0160	175	50	40	95	3,0	0,5

Beispiel für Artikelnummer Example of article number R2-0063-0050-MD

Reduzierung Symmetrisch 250/50 bis 315/250 mm als Stecksystem mit Eingespritzter Lippendichtung

Reducers Symmetrical 250/50 to 315/250 mm Plug-In System with Injected Lip Seal

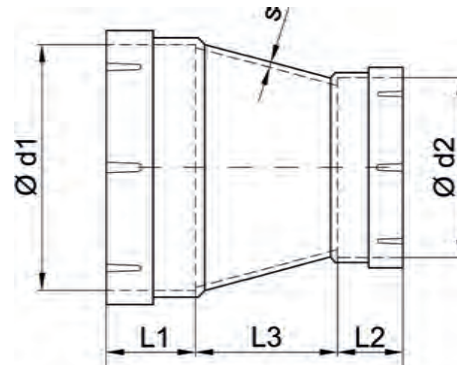

		PPs, PP, PE, PPs-el					
Ød1	Ød2	L	L1	L2	L3	s	kg
0250	0050	460	50	25	385	3,0	0,9
0250	0063	455	50	25	380	3,0	0,9
0250	0075	445	50	35	360	3,0	0,8
0250	0090	415	50	35	330	3,0	0,8
0250	0110	360	50	40	270	3,0	0,8
0250	0125	340	50	40	250	3,0	0,7
0250	0160	305	50	40	215	3,0	0,7
0250	0200	200	50	40	110	3,0	0,6
0315	0110	470	50	40	380	3,0	0,1
0315	0125	460	50	40	370	3,0	1,2
0315	0160	435	50	40	345	3,0	1,2
0315	0200	395	50	40	305	3,0	1,1
0315	0250	240	50	50	140	4,0	1,5


Beispiel für Artikelnummer Example of article number R2-0250-0050-MD

T-Stück 90°

als Stecksystem mit Eingespritzter
Lippendichtung

T-piece 90°

Plug-In System with Injected Lip Seal

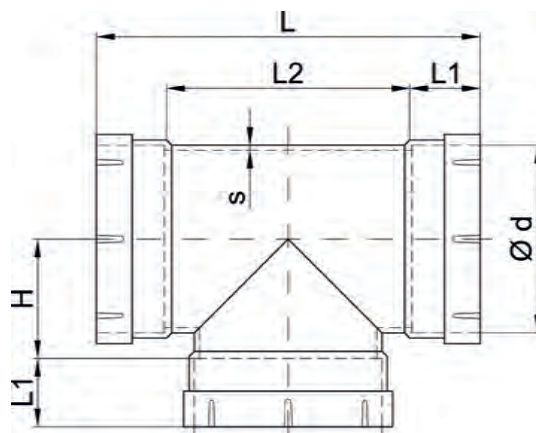

PPs, PP, PE, PPs-el						
Ø d	L	L1	L2	H	s	kg
0050	120	25	70	35	3,0	0,2
0063	140	25	90	45	3,0	0,2
0075	170	35	100	55	3,0	0,3
0090	200	35	130	60	3,0	0,4
0110	225	40	145	70	3,0	0,5
0125	265	40	185	85	3,5	0,5
0160	330	40	250	100	4,5	0,6
0200	355	40	275	120	5,0	1,2
0250	415	50	315	145	5,5	1,6
0315	510	50	410	190	3,5	3,3

Beispiel für Artikelnummer Example of article number T2-90-0050-MD